

# The Quadro (UGR<19) Series



...Taking you forward




The new Quadro(UGR<19) LED 36W Panels include a flicker free driver and have a UGR19 rating for low glare applications like IT and Manufacturing facilities.

## Specification

<b>LED:</b>	192pcs of 4014
<b>Material:</b>	Aluminium and polycarbonate diffuser
<b>Lumen Output:</b>	2880lm
<b>Guarantee:</b>	5 Years
<b>Life Expectancy:</b>	50,000 Hours
<b>Working Temperature:</b>	-10°C - 50°C
<b>Power Factor:</b>	0.9
<b>Beam Angle:</b>	120°
<b>CRI:</b>	>80 Ra

## Additional Information

- Dimmable driver available.
- Emergency conversion available.
- 266lm in emergency mode.
- Flicker free driver included.
- Recessed Mounting Kit available.
- Surface Mounting Kit available.
- White RAL9016 finish.
- TP (b) rated diffuser (from 3115)

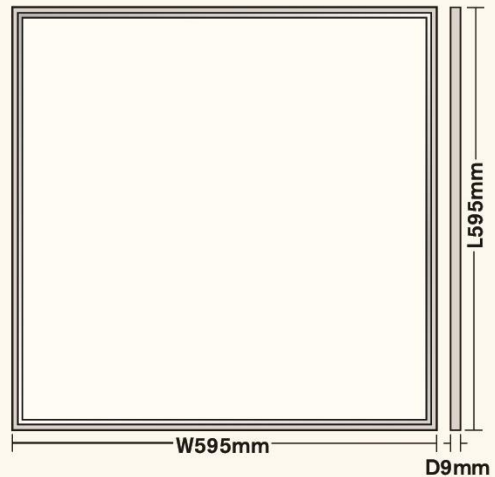

UGR<19  
LOW GLARE

Colour Temperature	Dimensions (L x W x D mm)
4000K	595 x 595 x 9
6000K	595 x 595 x 9