

SPECIFICATION SHEET

DURO-B STRONG EFFECTIVE NON-CORROSIVE LED FITTING

The new waterproof LED Non-Corrosive, with a Tridonic driver, streamlined body, quick terminal connector and multiple entry options.

Applications:

• Commercial Kitchens • Commercial Sites • Factories



powered by
TRIDONIC


Specification

LED:	132-384pcs of 0.2W 2835 LED
Material:	ABS and polycarbonate
Colour Temperature:	4000K
Guarantee:	5 Years
Life Expectancy:	50,000 Hours
Working Temperature:	-20°C - 40°C / 0°C - 40°C for EM
Power Factor:	0.9
Beam Angle:	120°
CRI:	80 Ra

Additional Information

- 4/8/10/12 Diffuser clips included. 90lm/W. Microwave Sensors (WFLEDMS / MSLEDEXT) available. Grey finish. Ni-Cd Battery included with emergency versions. Mounting bracket included. Opal diffuser. Painted metal LED tray included. Screws included. Tridonic driver included.

Dimensions

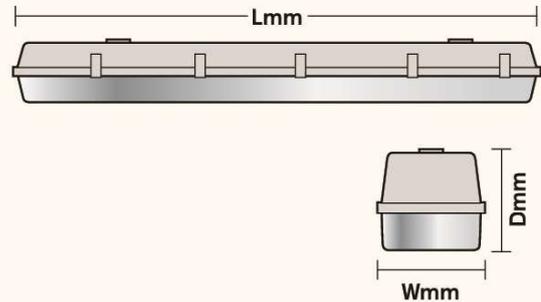

Wattage	Emergency	Lumen Output	Dimensions (L x W x D mm)
24W	No	2160lm	655 x 105 x 110
24W	Yes	2160lm (180lm in EM mode)	655 x 105 x 110
25W	No	2250lm	1265 x 105 x 110
25W	Yes	2250lm (180lm in EM mode)	1265 x 105 x 110
50W	No	4500lm	1265 x 105 x 110
50W	Yes	4500lm (360lm in EM mode)	1265 x 105 x 110
35W	No	3150lm	1565 x 105 x 110
35W	Yes	3150lm (270lm in EM mode)	1565 x 105 x 110
70W	No	6300lm	1565 x 105 x 110
70W	Yes	6300lm (450lm in EM mode)	1565 x 105 x 110
40W	No	3600lm	1860 x 105 x 110
40W	Yes	3600lm (270lm in EM mode)	1860 x 105 x 110
80W	No	7200lm	1860 x 105 x 110
80W	Yes	7200lm (450lm in EM mode)	1860 x 105 x 110

Stainless Steel Clip