

SPECIFICATION SHEET

DURO-C IP65 & IK10 rated with outstanding lux levels

The versatile and high powered LED Linear Hi-Lo Bay is suitable for factories and warehouse applications. The dimmable driver offers significant energy and security benefits when used with the sensor accessories.

Applications:

- Factories
- Leisure Centres
- Warehouses




Specification

LED:	126-252pcs of 3030
Material:	Aluminium and polycarbonate cover
Lumen Output:	8100-26,500lm
Colour Temperature:	6000K
Guarantee:	5 Years
Life Expectancy:	50,000 Hours
Working Temperature:	-30°C -50°C
Power Factor:	>0.92
Beam Angle:	120°
CRI:	>80 Ra

Additional Information

- 0.3m Cable Length • 1-10V Meanwell dimming driver included.
- 135lm/W • Corrosion-proof, waterproof and dustproof
- Hanging/Mounting bracket • Polarity of dimming cables: Blue = + (positive) White = - (negative) • Screw terminal block • Silver/Opal finish
- Suitable to be installed at a height of 4-12m • Weight: 3.2kg - 5.5kg

Dimensions

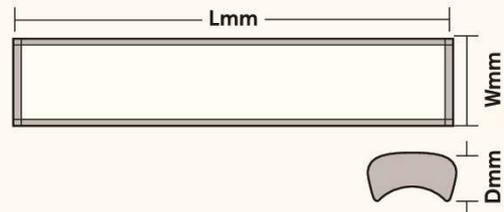

Description	Lumen Output	Dimensions (L x W x D mm)
60W	8100lm	605 x 135 x 125
100W	13,300lm	605 x 135 x 125
150W	20,000lm	905 x 135 x 125
200W	26,500lm	1205 x 135 x 125
		600
		900
		1200
Daylight Sensor	-	75 x 33 x 25
Hanging Bracket	-	100 x 60 x 30
Microwave Sensor	-	72 x 59
Remote Control for HLBMS	-	116 x 53 x 12
Emergency Remote Box Flexi	-	270 x 38 x 68